


Uputstvo za podešavanje konekcije na MERCUSYS MW305R modelu rutera

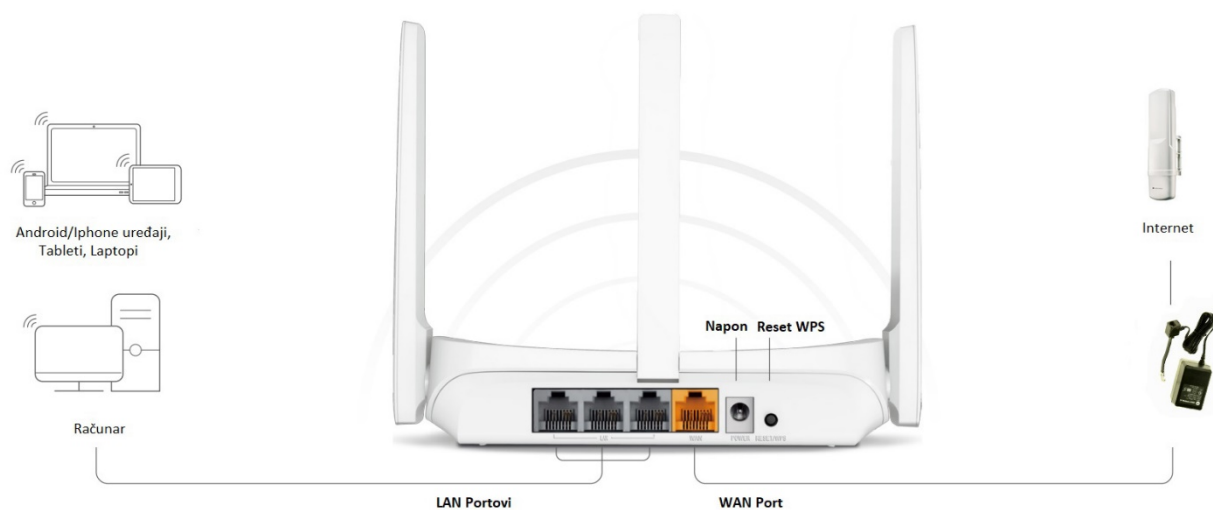


Nakon što se ruter spoji u napon, potrebno je kabal od antene koja je vani montirana, a koji je sproveden u prostoriju, prvo povezati na napajanje od antene (sličica desno), u malu crnu kockicu na kratkom dijelu naponskog kabla, a zatim kratki dio kabla sa napajanja, povezati u WAN port na ruteru.

U LAN portove na ruteru, žičano se mogu povezati desktop računari.

Kada smo povezali ruter sa računarom, u web pretraživaču (Edge, Chrome, Firefox) potrebno je unijeti IP adresu od rutera, a to je kao što se vidi sa slike dole ispod: 192.168.1.1 ili 192.168.0.1.


Zatim, na ekranu će nam se pojaviti prozor sa slike ispod, gdje je potrebno kreirati lozinku za pristup ruteru. U prvo polje kreiramo lozinku, a u drugo potvrđujemo istu. Najbolje je osmisliti lozinku koja će u prvoj riječi počinjati velikim slovom, pa nakon toga će ići recimo neki broj, a na kraju opet riječ koja počinje sa velikim slovom, npr.: *Marko29Markovic*.

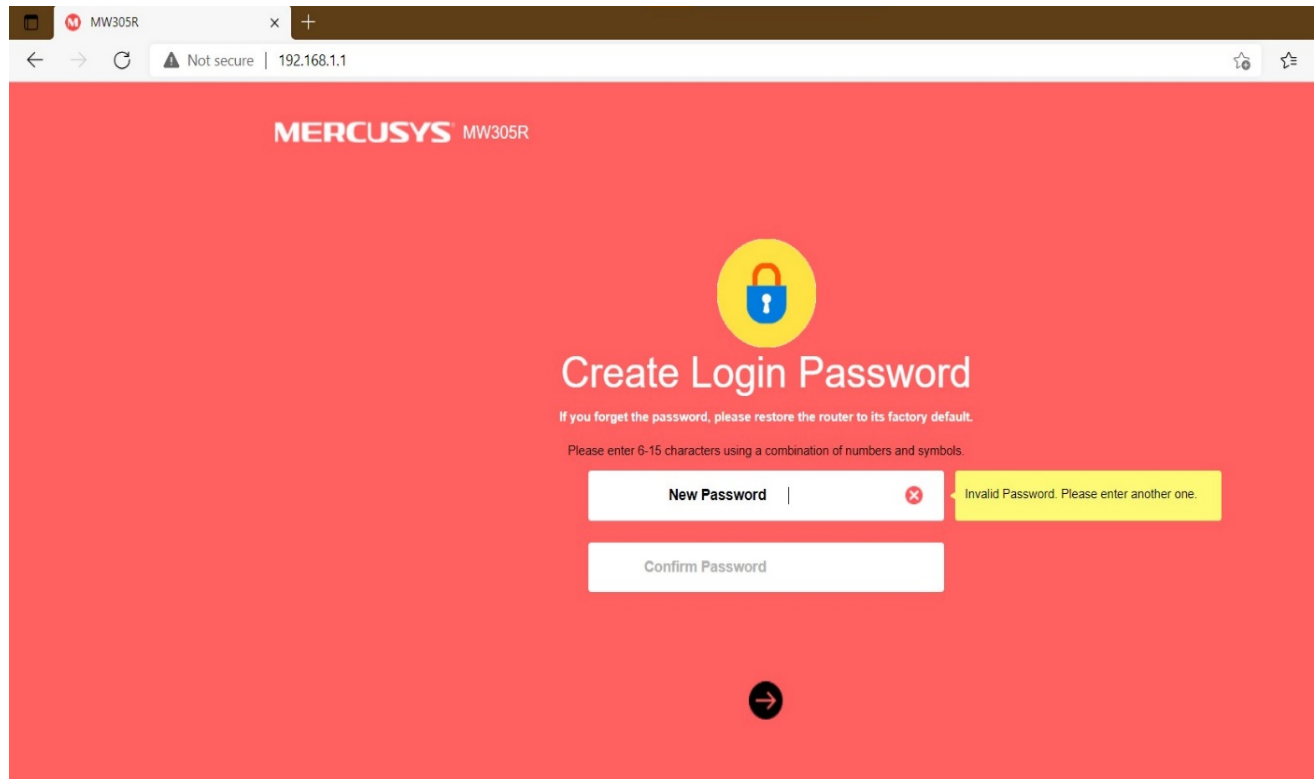

Slika 1.

Poslije kreiranja lozinke, u prvom polju biramo tip konekcije: **PPPoE**.

U polje **Username** unosimo korisničko ime sa ugovora: *marko.markovic*
dok u polje **Password** unesemo odgovarajuću lozinku, takođe, sa ugovora.

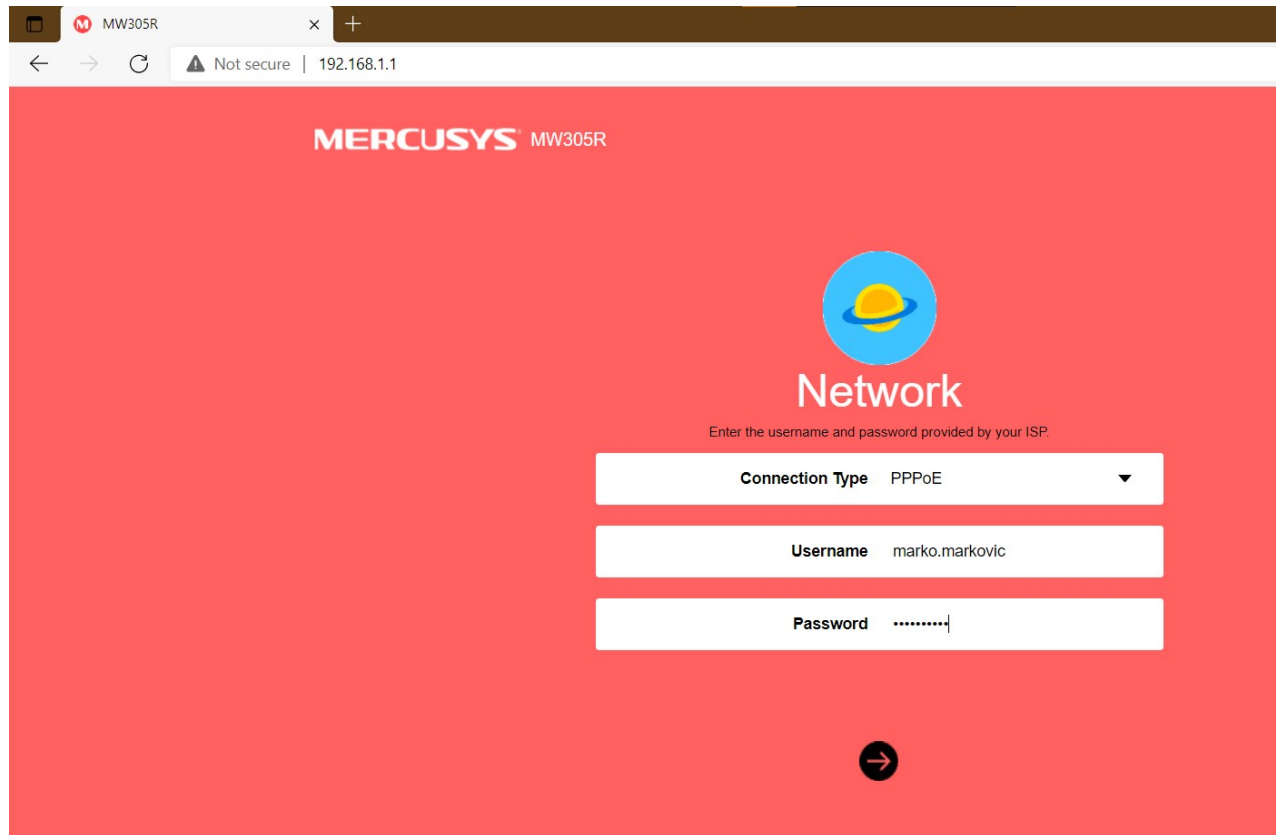


The screenshot shows a web browser window with the address bar displaying "192.168.1.1" and a warning "Not secure". The page title is "MERCUSYS MW305R". The main content area has a red background and features the "Network" logo, which consists of a blue circle with a yellow sun-like shape inside. Below the logo, the text "Enter the username and password provided by your ISP." is displayed. There are three input fields: "Connection Type" with a dropdown menu showing "PPPoE", "Username" with the text "marko.markovic", and "Password" with masked characters ".....". A black circular button with a white right-pointing arrow is located at the bottom center of the form.

Slika 2.

Na slici tri (Slika 3.), podešavamo parametre naše lokalne wireless mreže.

U prvom polju **SSID** proizvoljno odredimo kako će nam se zvati wireless mreža, npr. Markovic, a u polju **Password** možemo, takođe, prema želji staviti neku lozinku, npr: Marko29Starcevic.

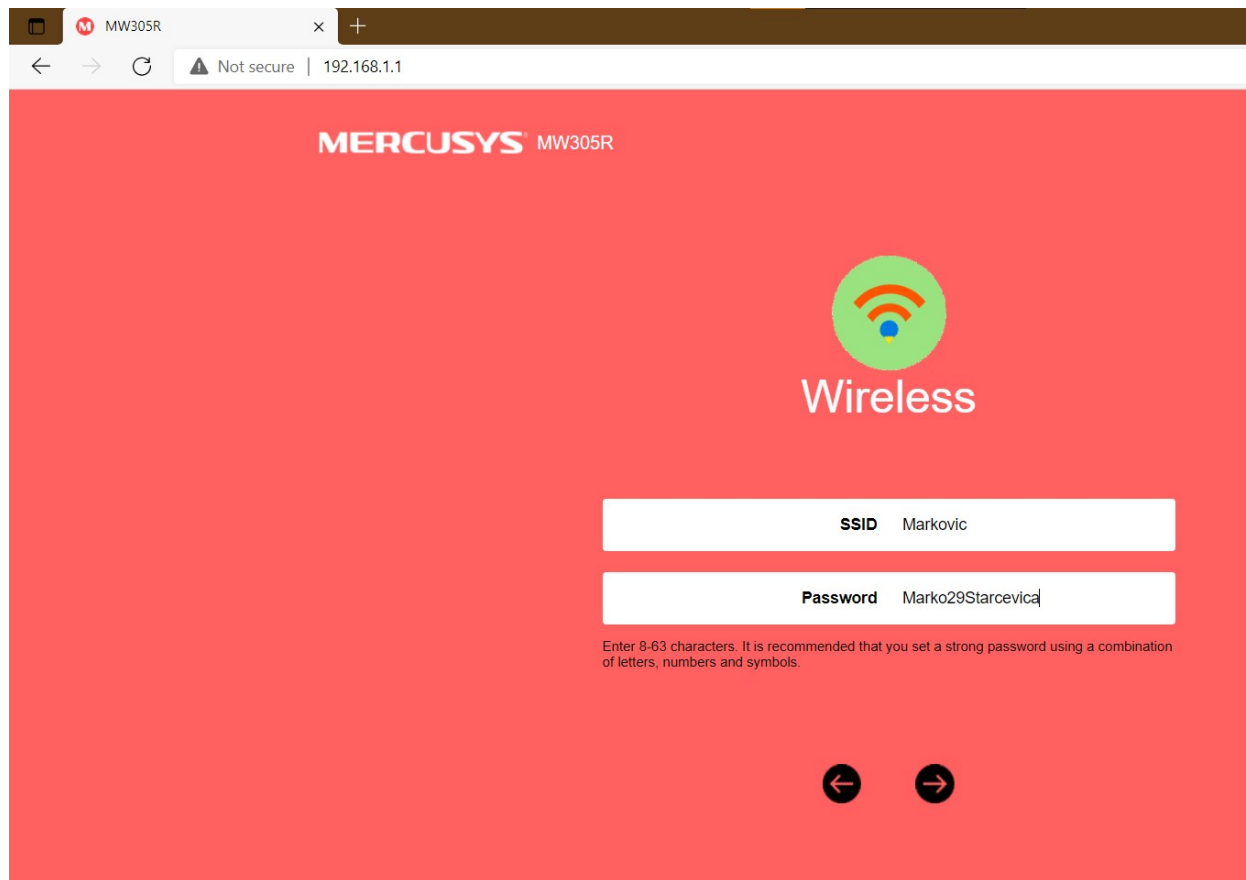

MERCUSYS® MW305R

Wireless

SSID Markovic


Password Marko29Starcevic

Enter 8-63 characters. It is recommended that you set a strong password using a combination of letters, numbers and symbols.

← →

(Slika 3.)


Ispod, odabirom zelene kvačice, završavamo podešavanje rutera (Slika 4.).

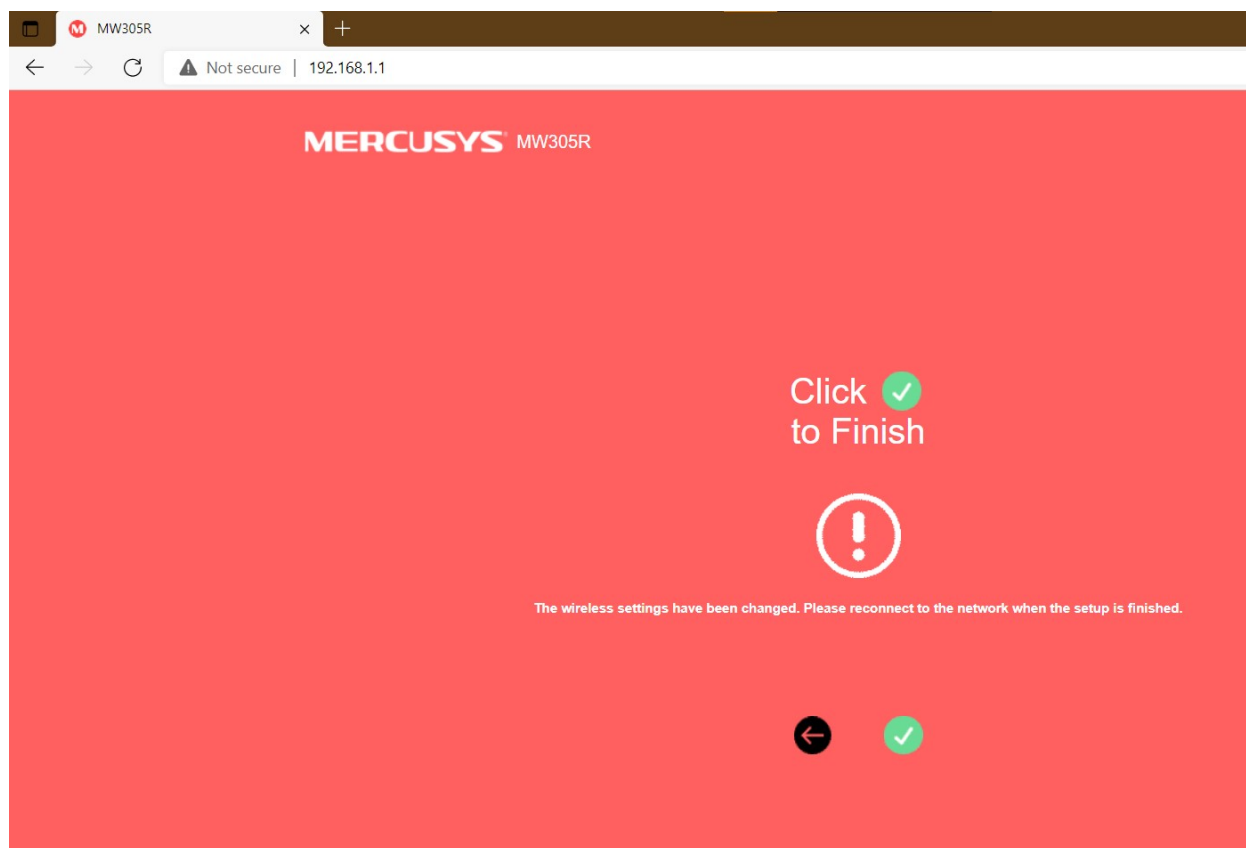

Slika 4.

Na slici pet (Slika 5.), u gornjem desnom uglu idemo na dugme **Advanced**, a zatim sa lijeve strane iz podmenija, prvo biramo rubriku System Tools, te **Reboot**, a onda opet na dugme *Reboot* na sredini ekrana, nakon čega će se pojaviti pitanje Da li ste sigurni da želite restartovati ruter? Odgovoriti potvrdno: **OK**.

Ruter će se restartovati nakon ove akcije i uspostaviti konekciju na Internet.

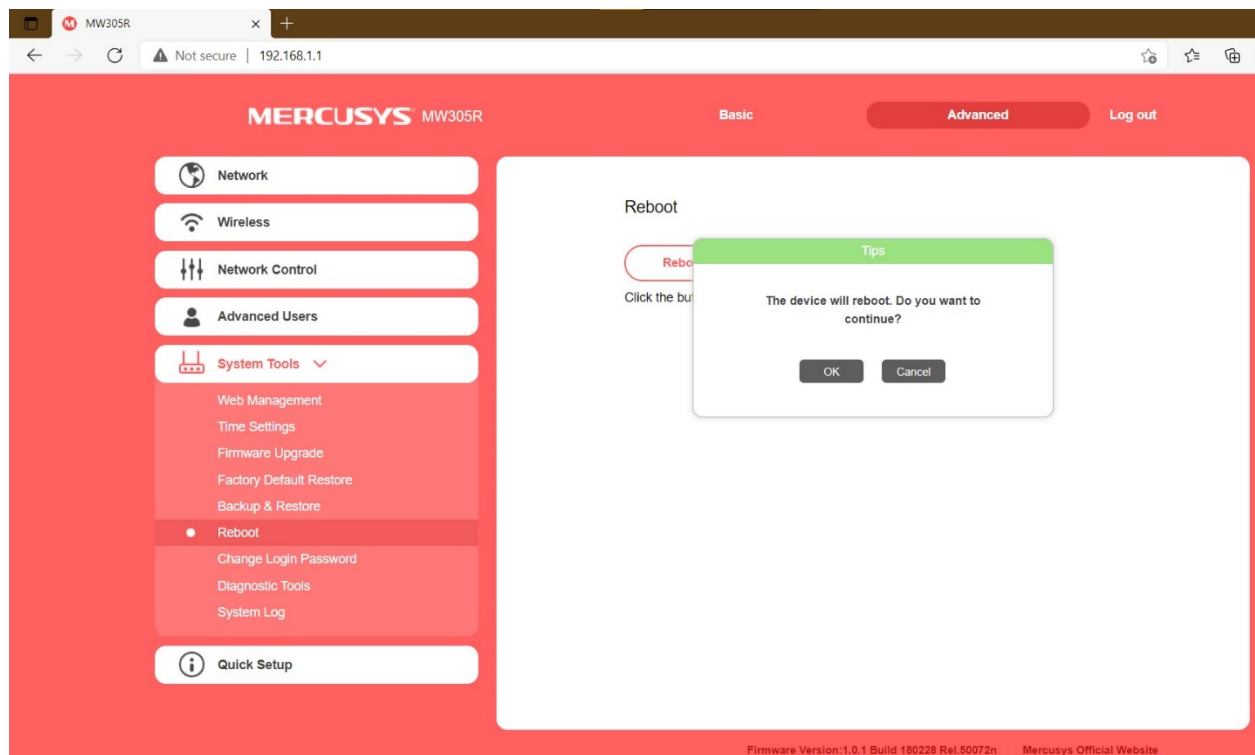

Slika 5.